
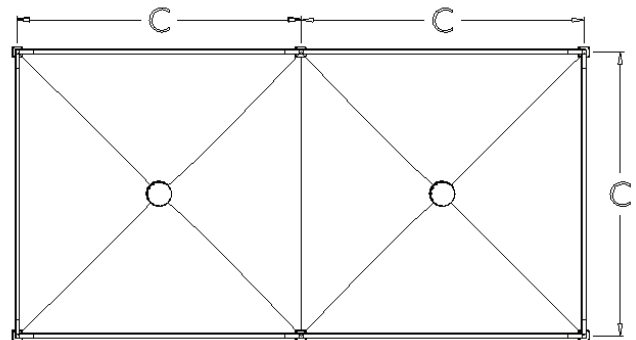


# FLEXSHADE® TetraMC™

- Features:**
- ✘ Seaman Tedlar® PVC / Polyester Membrane.
  - ✘ Hot Zinc & Powder Coated Steelwork.  
(Alternative Stainless Steel Support Frame)
  - ✘ Stainless Steel Fasteners & Fittings.
  - ✘ Designed to ASCE 7-05 and AS1170 Code and to comply with other Codes worldwide for 100mph wind speed

## TetraMC™ Series *Square Module T\*MC*

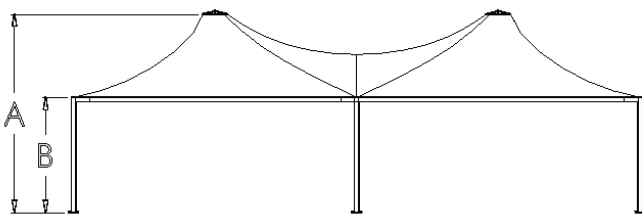

TYPE	*A	*B	*C
T7MC	4880 mm (16 ft)	2500 mm (9 ft 2 in) min	7000 mm (22 ft 11 in)
T6MC	4600 mm (15 ft 1 in)	2500 mm (9 ft 2 in) min	6000 mm (19 ft 8 in)
T5MC	4300 mm (14 ft 1 in)	2500 mm (9 ft 2 in) min	5000 mm (16 ft 4 in)
T4MC	4000 mm (13 ft 1 in)	2500 mm (9 ft 2 in) min	4000 mm (13 ft 1 in)



Flexshade Tetra™ can be designed to suit specific customer requirements for height and plan dimension.



An Activity of **TENSION SPAN STRUCTURES PTY LTD** ABN 20 050 400 836  
 62 Commercial Road, Fortitude Valley, Queensland, Australia 4006  
 Ph: (07) 3854 1900 Intl Ph: +61 7 3854 1900 Fax: (07) 3252 1252  
 Email: sales@flexshade.com Web: www.flexshade.com